

HENSEL

ENYFIT

enystar
enylpro
enylfit

enylfit



LES

Cable Entry Systems

Grommets ESM, IP 54 for knockouts M ..	346
Stepped grommets STM, IP 55 for knockouts M ..	347
Grommets EDK , IP 65 for knockouts M ..	348
Grommets EDR for conduits , IP 65 for knockouts M ..	349
Cable glands AKM, IP 66/67 for knockouts M ..	350 - 351
Cable glands ASM, IP 66 for knockouts M ..	352 - 353
Cable glands AFM, IP 65 for knockouts M ..	354 - 355
Cable glands ASS, IP 66/67 for knockouts M ..	356 - 357
Combi climate glands, IP 66/67 for knockouts M ..	358 - 362
Sealing plug VSB	363
Pressure compensation element BM 32	364
Stepped grommet, flange, cable retention	365
Outside diameter of conventional cable cross sections, assignment of cable outside diameters to cable entries	366
Cable glands AKS, IP 65 for knockouts PG ..	367 - 368
Technical Details	369 - 371



Further technical information can be found on the Internet
www.hensel-electric.de -> Products






ESM 16
Grommets
for knockouts M 16




- sealing range: Ø 4,8-11 mm
- bore-hole: Ø 16.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



ESM 20
Grommets
for knockouts M 20




- sealing range: Ø 6-13 mm
- bore-hole: Ø 20.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



ESM 25
Grommets
for knockouts M 25




- sealing range: Ø 9-17 mm
- bore-hole: Ø 25.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



ESM 32
Grommets
for knockouts M 32




- sealing range: Ø 9-23 mm
- bore-hole: Ø 32.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



ESM 40
Grommets
for knockouts M 40



- sealing range: Ø 17-30 mm
- bore-hole: Ø 40.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C





STM 16
Stepped grommet
for knockouts M 16



- sealing range: Ø 3,5-12 mm
- bore-hole: Ø 16.5 mm
- wall thickness 1.5-4 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



STM 20
Stepped grommet
for knockouts M 20



- sealing range: Ø 5-16 mm
- bore-hole: Ø 20.5 mm
- wall thickness 1.5-4 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



STM 25
Stepped grommet
for knockouts M 25



- sealing range: Ø 5-21 mm
- bore-hole: Ø 25.5 mm
- wall thickness 1.5-4 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



STM 32
Stepped grommet
for knockouts M 32



- sealing range: Ø 13-26,5 mm
- bore-hole: Ø 32.5 mm
- wall thickness 1.5-4 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



STM 40
Stepped grommet
for knockouts M 40



- sealing range: Ø 13-34 mm
- bore-hole: Ø 40.5 mm
- wall thickness 1.5-4 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C






EDK 16
Grommets
for knockouts M 16




- sealing range: Ø 5-10 mm
- bore-hole: Ø 16.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDK 20
Grommets
for knockouts M 20




- sealing range: Ø 6-13 mm
- bore-hole: Ø 20.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDK 25
Grommets
for knockouts M 25




- sealing range: Ø 9-17 mm
- bore-hole: Ø 25.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDK 32
Grommets
for knockouts M 32




- sealing range: Ø 8-23 mm
- bore-hole: Ø 32.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDK 40
Grommets
for knockouts M 40



- sealing range: Ø 11-30 mm
- bore-hole: Ø 40.5 mm
- wall thickness 1.5-3.5 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



ENYDASE

ENYDARD

ENYSTAR

ENYMOD

ENYFIT

Technical Data

Types



EDR 16

Grommets for conduits for knockouts M 16

- conduit connection M 16
- bore-hole: Ø 16.5 mm
- wall thickness 1.5-3.2 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDR 20

Grommets for conduits for knockouts M 20


- conduit connection M 20
- bore-hole: Ø 20.5 mm
- wall thickness 1.5-3.2 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDR 25

Grommets for conduits for knockouts M 25


- Rohranschluss M 25
- bore-hole: Ø 25.5 mm
- wall thickness 1.5-3.2 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDR 32

Grommets for conduits for knockouts M 32

- conduit connection M 32
- bore-hole: Ø 32.5 mm
- wall thickness 1.5-3.2 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C



EDR 40


Grommets for conduits for knockouts M 40

- conduit connection M 40
- bore-hole: Ø 40.5 mm
- wall thickness 1.5-3.2 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C






AKM 12
Cable glands
for knockouts M 12




- sealing range: Ø 4-6 mm
- ISO thread M 12 x 1.5
- bore-hole: Ø 12.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




tightening torque	0,9 Nm
-------------------	--------



AKM 16
Cable glands
for knockouts M 16




- sealing range: Ø 5-10 mm
- ISO thread M 16 x 1.5
- bore-hole: Ø 16.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




tightening torque	3,0 Nm
-------------------	--------



AKM 20
Cable glands
for knockouts M 20



- sealing range Ø 6,5-13,5 mm
- ISO thread M 20 x 1.5
- bore-hole: Ø 20.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



tightening torque	4,0 Nm
-------------------	--------



AKM 25
Cable glands
for knockouts M 25




- sealing range Ø 11-17 mm
- ISO thread M 25 x 1.5
- bore-hole: Ø 25.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



tightening torque	7,5 Nm
-------------------	--------



AKM 32
Cable glands
for knockouts M 32



- sealing range Ø 15-21 mm
- ISO thread M 32 x 1.5
- bore-hole: Ø 32.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



tightening torque	10,0 Nm
-------------------	---------



AKM 40
Cable glands
for knockouts M 40




- sealing range: Ø 19-28 mm
- ISO thread M 40 x 1.5
- bore-hole: Ø 40.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



tightening torque	10,0 Nm
-------------------	---------



AKM 50
Cable glands
for knockouts M 50



- sealing range: Ø 27-35 mm
- ISO thread M 50 x 1.5
- bore-hole: Ø 50.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



tightening torque	10,0 Nm
-------------------	---------



AKM 63
Cable glands
for knockouts M 63



- sealing range: Ø 35-48 mm
- ISO thread M 63 x 1.5
- bore-hole: Ø 63.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



tightening torque	10,0 Nm
-------------------	---------



ASM 12
Cable glands
for knockouts M 12



- sealing range: \varnothing 4-6 mm
- ISO thread M 12 x 1.5
- bore-hole: \varnothing 12.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C




tightening torque	0,7 Nm
-------------------	--------



ASM 16
Cable glands
for knockouts M 16



- sealing range: \varnothing 5-10 mm
- ISO thread M 16 x 1.5
- bore-hole: \varnothing 16.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C




tightening torque	2,0 Nm
-------------------	--------



ASM 20
Cable glands
for knockouts M 20



- sealing range \varnothing 6,5-13,5 mm
- ISO thread M 20 x 1.5
- bore-hole: \varnothing 20.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C




tightening torque	2,7 Nm
-------------------	--------



ASM 25
Cable glands
for knockouts M 25



- sealing range \varnothing 11-17 mm
- ISO thread M 25 x 1.5
- bore-hole: \varnothing 25.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	5,0 Nm
-------------------	--------

ENYCASE®

ENYBAND®

ENYSTAR®

ENYMOD®

ENYFIT

Technical Data

Types



ASM 32
Cable glands
for knockouts M 32



- sealing range Ø 15-21 mm
- ISO thread M 32 x 1.5
- bore-hole: Ø 32.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	7,5 Nm
-------------------	--------



ASM 40
Cable glands
for knockouts M 40



- sealing range: Ø 19-28 mm
- ISO thread M 40 x 1.5
- bore-hole: Ø 40.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	10 Nm
-------------------	-------



ASM 50
Cable glands
for knockouts M 50




- sealing range: Ø 27-35 mm
- ISO thread M 50 x 1.5
- bore-hole: Ø 50.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	7,5 Nm
-------------------	--------



ASM 63
Cable glands
for knockouts M 63



- sealing range: Ø 35-48 mm
- ISO thread M 63 x 1.5
- bore-hole: Ø 63.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	7,5 Nm
-------------------	--------

ENYDASE

ENYDARD

ENYSTAR

ENYMOD

ENYFIT

Technical Data

Types



AFM 16
Cable glands
for knockouts M 16



- sealing range: Ø 5-10 mm
- bore-hole: Ø 16.3 mm
- wall thickness 1-4 mm
- the cable gland can be mounted without locknut
- Especially useful when it is difficult to mount a lock nut in boxes.
- with strain relief
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 20 °C up to + 55 °C
- glow wire test IEC 60 695-2-11: 750 °C



tightening torque	2,0 Nm
-------------------	--------



AFM 20
Cable glands
for knockouts M 20




- sealing range: Ø 8-13 mm
- bore-hole: Ø 20.3 mm
- wall thickness 1-4 mm
- the cable gland can be mounted without locknut
- Especially useful when it is difficult to mount a lock nut in boxes.
- with strain relief
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 20 °C up to + 55 °C
- glow wire test IEC 60 695-2-11: 750 °C



tightening torque	2,7 Nm
-------------------	--------



AFM 25
Cable glands
for knockouts M 25



- sealing range Ø 11-17 mm
- bore-hole: Ø 25.3 mm
- wall thickness 1-4 mm
- the cable gland can be mounted without locknut
- Especially useful when it is difficult to mount a lock nut in boxes.
- with strain relief
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 20 °C up to + 55 °C
- glow wire test IEC 60 695-2-11: 750 °C




tightening torque	5,0 Nm
-------------------	--------



AFM 32

**Cable glands
for knockouts M 32**

- sealing range Ø 15-21 mm
- bore-hole: Ø 32.3 mm
- wall thickness 1-4 mm
- the cable gland can be mounted without locknut
- Especially useful when it is difficult to mount a lock nut in boxes.
- with strain relief
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 20 °C up to + 55 °C
- glow wire test IEC 60 695-2-11: 750 °C



tightening torque	7,5 Nm
-------------------	--------


ENYCASE

ENYGLAND

ENYSTAR

ENYMOD

ENYFIT

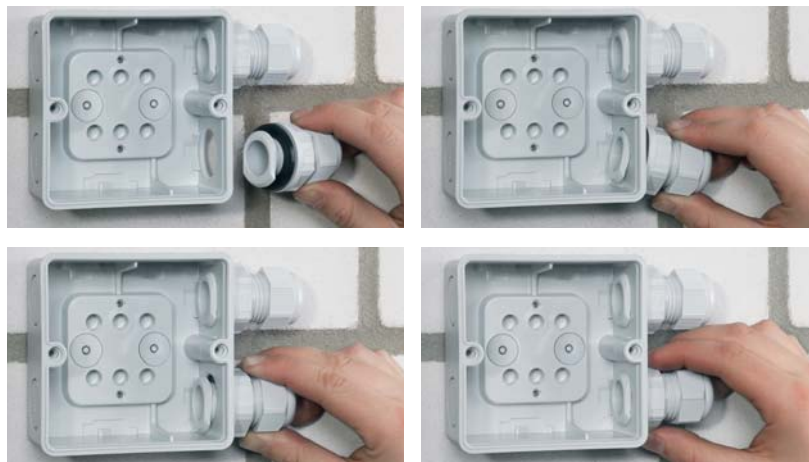

Technical Data

Types



ASS 12
Cable glands
for knockouts M 12




- sealing range: \varnothing 2-5 mm
- ISO thread M 12 x 1.5
- bore-hole: \varnothing 12.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C




tightening torque	0,9 Nm
-------------------	--------



ASS 16
Cable glands
for knockouts M 16



- sealing range: \varnothing 3-10 mm
- ISO thread M 16 x 1.5
- bore-hole: \varnothing 16.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C




tightening torque	3,0 Nm
-------------------	--------



ASS 20
Cable glands
for knockouts M 20




- sealing range: \varnothing 5-13 mm
- ISO thread M 20 x 1.5
- bore-hole: \varnothing 20.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	4,0 Nm
-------------------	--------



ASS 25
Cable glands
for knockouts M 25



- sealing range: \varnothing 8-17 mm
- ISO thread M 25 x 1.5
- bore-hole: \varnothing 25.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	7,5 Nm
-------------------	--------



ASS 32

Cable glands for knockouts M 32

- sealing range: Ø 12-21 mm
- ISO thread M 32 x 1.5
- bore-hole: Ø 32.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	10,0 Nm
-------------------	---------



ASS 40

Cable glands for knockouts M 40

- sealing range: Ø 16-28,5 mm
- ISO thread M 40 x 1.5
- bore-hole: Ø 40.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	10,0 Nm
-------------------	---------



ASS 50

Cable glands for knockouts M 50

- sealing range: Ø 21-35 mm
- ISO thread M 50 x 1.5
- bore-hole: Ø 50.3 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C




tightening torque	10,0 Nm
-------------------	---------



ASS 63

Cable glands for knockouts M 63

- sealing range: Ø 20-48 mm
- ISO thread M 63 x 1.5
- bore-hole: Ø 63.3 mm
- Wall thickness up to 3 mm
- with counter nut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C



tightening torque	10,0 Nm
-------------------	---------

**New product of Hensel:
Ventilation and cable entry
in one!**

In general the formation of water in case of condensation in closed enclosures cannot be prevented in installation areas with high temperature differences!




The combi climate gland allows the cable entry and pressure compensation additionally.

Combi climate glands prevent accumulations of condensation, which can form among others by large temperature fluctuations, like changing weather, intensive solar irradiation etc., in enclosures with high degree of protection.

For adherence to the requested degree of protection the ventilation of the enclosure is effected via a special combi climate gland.

Via an inserted, breathable membrane combi climate glands ensure pressure compensation between enclosure interior and ambient air.

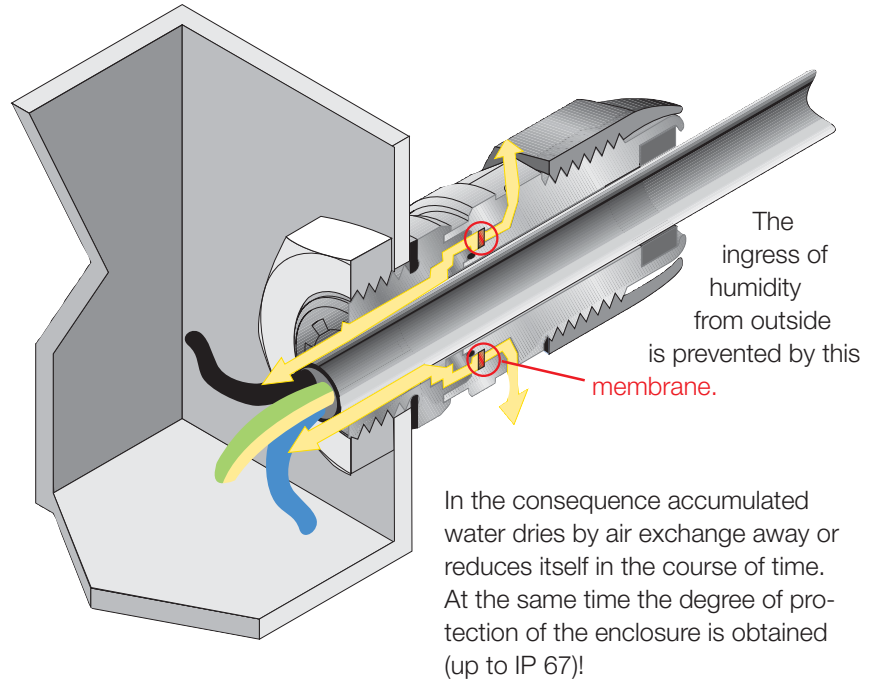

Your advantages with combi climate glands:


- Cable entry and ventilation in one!
- Degree of protection of enclosure is obtained



KBM 20

Combi climate gland for knockouts M 20

- for the reduction of condensation by pressure compensation
- sealing range: Ø 6-13 mm
- ISO thread M 20 x 1.5
- bore-hole: Ø 20.5 mm
- wall thickness up to 3,5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M20 must be used per 6 litres (6000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12,393 litres.
Number of necessary combi climate glands M20 ≥ 3 pieces.
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.




tightening torque	3,0 Nm
-------------------	--------



KBM 25

Combi climate gland for knockouts M 25

- for the reduction of condensation by pressure compensation
- sealing range: Ø 9-17 mm
- ISO thread M 25 x 1.5
- bore-hole: Ø 25.5 mm
- wall thickness up to 3,5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M25 must be used per 10 litres (10000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12,393 litres.
Number of necessary combi climate glands M25 ≥ 2 pieces
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.




tightening torque	4,0 Nm
-------------------	--------



KBM 32
Combi climate gland for knockouts M 32




- for the reduction of condensation by pressure compensation
- sealing range: Ø 13-21 mm
- ISO thread M 32 x 1.5
- bore-hole: Ø 32.5 mm
- wall thickness up to 3,5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M32 must be used per 12 litres (12000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12,393 litres.
Number of necessary combi climate glands M32 ≥ 2 piece.
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.




tightening torque	4,0 Nm
-------------------	--------



KBM 40
Combi climate gland for knockouts M 40



- for the reduction of condensation by pressure compensation
- sealing range: Ø 16-28 mm
- ISO thread M 40 x 1.5
- bore-hole: Ø 40.5 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M40 must be used per 16 litres (16000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12.393 litres.
Number of necessary KB. 40 (M40) ≥ 1 piece.
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.



tightening torque	6,0 Nm
-------------------	--------




KBS 20

Combi climate gland for knockouts M 20



- for the reduction of condensation by pressure compensation
- sealing range: Ø 6-13 mm
- ISO thread M 20 x 1.5
- bore-hole: Ø 20.5 mm
- wall thickness up to 3,5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M20 must be used per 6 litres (6000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12,393 litres.
Number of necessary combi climate glands M20 ≥ 3 pieces.
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.




tightening torque	3,0 Nm
-------------------	--------




KBS 25

Combi climate gland for knockouts M 25



- for the reduction of condensation by pressure compensation
- sealing range: Ø 9-17 mm
- ISO thread M 25 x 1.5
- bore-hole: Ø 25.5 mm
- wall thickness up to 3,5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M25 must be used per 10 litres (10000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12,393 litres.
Number of necessary combi climate glands M25 ≥ 2 pieces
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.




tightening torque	4,0 Nm
-------------------	--------

**KBS 32****Combi climate gland
for knockouts M 32**

- for the reduction of condensation by pressure compensation
- sealing range: \varnothing 13-21 mm
- ISO thread M 32 x 1.5
- bore-hole: \varnothing 32.5 mm
- wall thickness up to 3,5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M32 must be used per 12 litres (12000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12,393 litres.
Number of necessary combi climate glands M32 \geq 2 piece.
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.

tightening torque



4,0 Nm

**KBS 40****Combi climate gland
for knockouts M 40**

- for the reduction of condensation by pressure compensation
- sealing range: \varnothing 16-28 mm
- ISO thread M 40 x 1.5
- bore-hole: \varnothing 40.5 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- glow wire test IEC 60 695-2-11: 960°C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one combi climate gland M40 must be used per 16 litres (16000 cm³) of enclosure volume.
- Example:
enclosure size 27 cm x 27 cm x 17 cm = 12393 cm³ = 12.393 litres.
Number of necessary KB. 40 (M40) \geq 1 piece.
- When using different gland sizes the values for the enclosure volumes of the used combi climate glands can be added on.
- If the quantity of the necessary climate glands for pressure compensation is larger, than the number of necessary cable glands for cable entry, the unused climate glands can be sealed with sealing plugs.

tightening torque

6,0 Nm





VSB 13

Sealing plug
diameter 13 mm



- for sealing combi climate glands M20 or M25, which are not used for cable entry
- ambient temperature - 25 °C to + 55 °C




VSB 21

Sealing plug
diameter 21 mm



- for sealing combi climate glands M32 and M40, which are not used for cable entry
- ambient temperature - 25 °C to + 55 °C




BM 32

Pressure compensation element for M 32 knockouts

- for the reduction of condensation by pressure compensation in power distribution systems
- ISO thread M 32 x 1.5
- bore-hole: Ø 32.3 mm
- wall thickness of up to 8 mm
- with counter nut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- In order not to exceed leakage limit of 0.07 bar with pressure compensation, one pressure compensation element BM 32 must be used per 42 litres (42000 cm³) of enclosure volume.
- Example:
 enclosure size 30 cm x 60 cm x 17 cm = 30600 cm³ = 30,6 litres.
 Number of necessary BM 32 (M32) = 1 piece.

IP	ASA/PC Blend	RAL
65		7016



Pressure compensation element BM 32





KST 70
Stepped grommet



- sealing range: Ø 30-72 mm
- bore-hole: Ø 83 mm
- wall thickness 1.5-3 mm
- for indoor - normal environment and (or) protected outdoor installation
- ambient temperature - 25 °C to + 35 °C
- glow wire test IEC 60 695-2-11: 750 °C




ENYDASE



MV FP 66
Flange



- with cable entry glands and screws
- sealing range: Ø 30-72 mm
- wall thickness of at least 1.5 mm



ENYDARD



KHR 01
Cable retention
for cable diameter 6,5 - 14 mm

- set with 10 x 6 cable retention rings
- 30 pieces for cable diameter 6,5 - 10 mm
- 30 pieces for cable diameter 10 - 14 mm

ENYSTAR



KHR 02
Cable retention
for cable diameter 10 - 16 mm

- set with 10 x 6 cable retention rings
- 30 pieces for cable diameter 10 - 14 mm
- 30 pieces for cable diameter 13 - 16 mm

ENYMOD

ENYFIT

Cable retention



Technical Data

Types




AKS 9
for knockouts Pg 9

- sealing range: Ø 4-8 mm
- for bore-hole Pg 9, Ø 15.5 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




AKS 11
for knockouts Pg 11

- sealing range: Ø 5-10 mm
- for bore-hole Pg 11, Ø 19 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




AKS 13,5
for knockouts Pg 13.5

- sealing range: Ø 6-12 mm
- bore-hole Pg 13,5, Ø 21 mm
- Wall thickness up to 3 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




AKS 16
for knockouts Pg 16

- sealing range: Ø 10-14 mm
- for bore-hole Pg 16, Ø 23 mm
- wall thickness up to 4 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




AKS 21
for knockouts Pg 21

- sealing range: Ø 13-18 mm
- for bore-hole Pg 21, Ø 29 mm
- wall thickness up to 4 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960°







AKS 29
for knockouts Pg 29




- sealing range: Ø 18-25 mm
- for bore-hole Pg 29, Ø 37.5 mm
- wall thickness up to 4 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




AKS 36
for knockouts Pg 36




- sealing range: Ø 22-32 mm
- for bore-hole Pg 36, Ø 47.5 mm
- wall thickness of up to 5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C




AKS 42
for knockouts Pg 42




- sealing range: Ø 30-38 mm
- for bore-hole Pg 42, Ø 54,5 mm
- wall thickness of up to 5 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C



AKS 48
for knockouts Pg 48




- sealing range: Ø 34-44 mm
- bore-hole Pg 48, Ø 60 mm
- wall thickness of up to 6 mm
- with strain relief and locknut
- for indoor (normal environment and/or protected outdoor) and outdoor installation (harsh environment and/or outdoor)
- ambient temperature - 25 °C to + 55 °C
- Glow wire test IEC 60 695-2-11: 960 °C





Dimensions	370
Operating and ambient conditions	371

ENYCASE




Grommets in mm	A	B	B1	C	D
ESM 16	16.5	22	18.5	14.5	8.5
ESM 20	20.5	26	22.5	14.5	8.5
ESM 25	26.0	31	27.5	14.5	8.5
ESM 32	33.0	38	34.5	17.5	8.5
ESM 40	41.0	46	42.5	17.5	8.5

Grommets ESM

Degree of protection IP 55
 Grommets ESM are inserted into knockouts. There is no counter nut required!

ENYBOARD




Stepped grommet in mm	A	B	B1	C	D
STM 16	13.2	21.2	19	7.4	8.0
STM 20	18.0	25	23	9.2	8.0
STM 25	21.6	30	28	11.5	7.4
STM 32	27.6	37	35	11.5	8.6
STM 40	33.6	45	43	15.1	8.6

Stepped grommets STM

Degree of protection IP 55
 Stepped glands STM are inserted into knockouts. There is no counter nut required!

ENYSTAR




Grommets in mm	A	B	B1	C	D
EDK 16	14.5	22	18.5	13.5	8.5
EDK 20	18.5	26	22.5	14.5	8.5
EDK 25	23.5	31	27.5	14.5	8.5
EDK 32	30.5	38	34.5	19.5	8.5
EDK 40	38.5	46	42.5	19.5	8.5

Grommets EDK

Degree of protection IP 65
 Grommets EDK are inserted into knockouts. There is no counter nut required!

ENYMOD




Grommets for conduits in mm	A	B	B1	C	D
EDR 16	20	22	18.5	14.5	8.5
EDR 20	24	26	22.5	14.5	8.5
EDR 25	29	31	27.5	14.5	8.5
EDR 32	36	38	34.5	17.5	8.5
EDR 40	44	46	42.5	17.5	8.5

Grommets for conduits EDR

Degree of protection IP 65
 Grommets for conduits EDR are inserted into knockouts. There is no counter nut required!


ENYFIT




Cable glands ASM/AKM/ASS with strain relief counter nut, degree of protection IP 65								
in mm	ISO	SW1 across flats	EK1 across corners Ø	C max.	D	SW2 across flats	EKS across corners Ø	H
ASM/AKM/ASS 12	M 12	15	16.4	22	8	17	19.0	5
ASM/AKM/ASS 16	M 16	20	22.0	26	8	22	24.7	5
ASM/AKM/ASS 20	M 20	24	26.5	29	8	27	30.2	6
ASM/AKM/ASS 25	M 25	29	32.0	34	8	32	36.0	6
ASM/AKM/ASS 32	M 32	36	39.7	39	10	41	46.0	7
ASM/AKM/ASS 40	M 40	46	50.5	46	10	50	54.1	7
ASM/AKM/ASS 50	M 50	55	60.0	51	10	60	66.3	8
ASM/AKM/ASS 63	M 63	68	74.7	55	10	75	83.0	8

Combi climate glands KBM / KBS with strain relief counter nut, degree of protection IP 66 / IP 67								
in mm	ISO	SW1 across flats	EK1 across corners Ø	C max.	D	SW2 across flats	EK2 across corners Ø	H
KBM/KBS 20	M 20	24	27,0	42	8	27	29,0	5
KBM/KBS 25	M 25	29	32,0	45	8	32	35,5	5
KBM/KBS 32	M 32	36	40,0	47	10	40	44,5	6
KBM/KBS 40	M 40	46	50,5	59	10	50	54,1	7


Technical Data



Cable glands AFM with strain relief			
in mm	SW1 across flats	SW2 across flats	EK2 across corners Ø
AFM 16	20	24	26.5
AFM 20	24	26	29.0
AFM 25	29	32	36.0
AFM 32	36	42	46.0




Types



Flange MV FP 66

Degree of protection IP 55
 for retrofitting onto boxes made of sheet steel material thickness ≥ 1,5 mm



	ESM ... STM ... EDK ... EDR ... KST... MV FP 66	Ste ...	ASM ...	ASS ...	AFM ... AKM ... AKS ...	KBM ... KBS ...
Application area	Suitable for indoor installation (normal environment and/or protected outdoor)		Suitable for outdoor installation - harsh environment and / or outdoor			
Ambient temperature	Demands placed on electrical devices from standards and laws:					
- Average value over 24 hours	+ 35 °C	+ 35 °C	+ 55 °C	+ 55 °C	+ 55 °C	+ 55 °C
- Maximum value	+ 40 °C	+ 40 °C	+ 70 °C	+ 70 °C	+ 70 °C	+ 70 °C
- Minimum value	- 25 °C	- 25 °C	- 25 °C	- 25 °C	- 25 °C	- 25 °C
Fire protection in the event of internal faults	Minimum requirements					
	- Glow wire test in accordance with IEC 60 695-2-11: - 650 °C for boxes and cable glands					
Burning behaviour	Minimum requirements					
- Glow wire test IEC 60 695-2-11	750 °C	650 °C	960 °C	960 °C	750 °C	960 °C
- UL Subject 94	flame-retardant self-extinguishing	flame-retardant self-extinguishing	V-0 flame-retardant self-extinguishing	V-2 flame-retardant self-extinguishing	V-2 flame-retardant self-extinguishing	V-2 flame-retardant self-extinguishing
Toxic behaviour	halogen-free silicone-free		halogen-free silicone-free		halogen-free silicone-free	

“Halogen-free” in accordance with IEC 754-2
“Common test methods for cables - Determination of the amount of halogen acid gas”.

For material properties see technical data.